

Materials Needed:



DIAMONDUO™ 2-HOLE BEAD 5X8MM CHALK LUMI PURPLE - 50 GRAM BAG (APX 340 PCS)

PRODUCT#: DD/CW15726/58



11/0 DARK RED OPAQUE LUSTER STRUNG CZECH SEED BEADS PRODUCT#: SB/98210/11/0

11/0 SILVER MATTE

CZECH SEED BEADS - APX 24G VIAL (APX 2640 PCS) PRODUCT#: VSB/0170/11/0







1MM ROUND LEATHER CORD USA™ LT. BROWN -50M(164FT) LARGE SPOÒL

PRODUCT#: 5001-1MM-13



BEADALON WILDFIRE .006 INCH GREEN 125YD PRODUCT#: 161P-010


BEADALON JEWEL LOOM PRODUCT#: 206S-060





Step 1:


Attach warp (3 leather cords, 1mm) to jewel loom, making sure cords are knotted around the buttons on both ends of the jewel loom. Warp cords should be placed 4 spaces apart from each other. Make sure the cords are pulled taut.



KEY Entry Point Half-Hitch Knot Thread's Direction Previous Steps = DiamonDuo™ **DD** Bead = Seed Bead SB (Color A) = Seed Bead SB (Color B)

Step 2:

Using 2 Meters of thread (This is called the WEFT); weave over Warp A, under Warp B, and then over Warp C.





Reverse thread's direction, and loop back under WARP C,


over WARP B, and then under WARP A. Continue back over

Step 4:

Continue this pattern (steps 2-3), pulling thread tightly, until you have about 1 CM width of woven thread. Bunched thread will form selvage edge to bracelet.

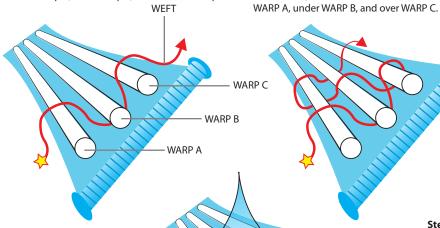






Step 5:

Push woven threads towards the edge so that they are tightly packed in together. Using bead adhesive, dot selvage edge with glue and let dry.

Threading under the 3 warp cords, add 6 SB (color A), placing 3 between each cord. Hold beads in place up against the warp cords.



Step 7:

Reverse thread's direction, and loop over the top of WARP C. Re-thread the 3 seed beads going in the opposite direction. Continue over WARP B, re-thread 3 seed beads, and then thread back over WARP A.


Step 8:

Step 3:

Reverse thread's direction, and loop under WARP A. Thread SB (color B), DD (either hole, just make sure faceted dome faces up), SB (Color B). Continue under WARP B, then add another SB (color B), DD, and SB. Reverse thread's direction, loop over WARP C, re-thread SB, DD, SB going in the opposite direction. Pass over WARP B, and continue through SB, DD, SB, and pull thread over the top of WARP A. Pull thread to tighten.


Step 9:

Reverse thread's direction, looping under WARP A. add SB (color B), DD (using remaining hole), add SB. Continue under WARP B, then add SB, DD (use remaining hole), SB. continue under WARP C.



Step 10:

Reverse thread's direction, looping over WARP C, re-thread SB, DD, SB. Pass over WARP B, re-thread SB, DD, SB. Continue Over WARP A. Repeat steps 6 - 10 until desired length of bracelet is reached. Repeat steps 2-3 until you've created another selvage edge, made of bunched thread woven into the 3 warp cords.



Step 11:

After glue is fully dry on both ends of bracelet, release tension by pulling knots off the buttons of jewel loom. Cut excess warp cords on both ends. Place selvage ends of bracelet inside end caps. Dot insides of clasps with glue, and clamp clasps tightly until glue is dry.

